


THIS DRAWING IS THE PROPERTY OF SAFEGUARD AND MUST NOT BE LOANED OR COPIED WITHOUT WRITTEN CONSENT

© 2005 SAFEGUARD LTD

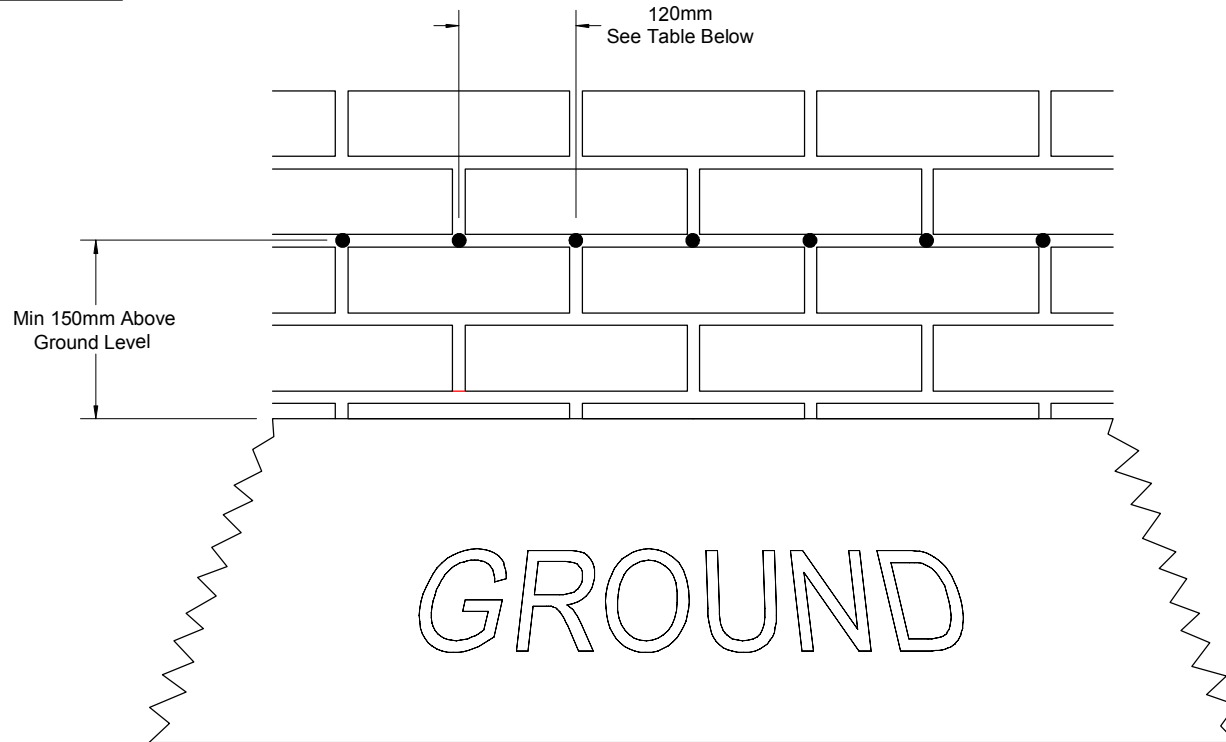

	Depth of 12mm Drill Hole Required for DryZone In Various Thickness of Wall			
Wall Thickness	4½" (110mm)	9" (220mm)	13½" (330mm)	18" (440mm)
Depth of Hole Req'd	100mm	190mm	310mm	430mm
Hole Centres	120mm	120mm	120mm	120mm

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38

NOTES:

System Drg. Nos:
 DZ-002.tow (TurboCAD)
 DZ-002.dwg (Autocad)
 DZ-002.pdf (Acrobat)

CLIENT:-
 Safeguard Damp Proofing Systems



CONTRACT No:
 DRAWN JDF, CBS
 DATE 15th February 2005
 SCALE (A3) Not To Scale

TITLE:
 DryZone
 Drilling Pattern
 for
 Stretcher Bond Brickwork

DRG. No. DZ-002
 REV 2

MOD. BY	DATE	CHK. BY	APP. BY	MOD. BY	DATE	CHK. BY	APP. BY	MOD. BY	DATE	CHK. BY	APP. BY

CHECKED
 APPROVED